

VHR 700



Flat top surface

Tilting angle 165°



Stepless adjustment of all positions

Information

The VHR-serie of positioners has been designed in close cooperation with welders to suit industrial operations involving welding.

The VHR positioner is also ideal for assembly work, grinding etc.

The VHR is the positioner that solves the problem of achieving the correct position when working with workpieces that are difficult to handle.

Lifting, turning and tilting to an ergonomically appropriate working position can be controlled steplessly.

All functions can be remotely controlled with a 24 V control signal.

Pedal for starting and stopping the rotary feed.


The welding earth for the work table is separate from the electrical protective earth.

Technical data VHR 700

Height of work table	550 – 1150 mm
Table diameter	750 mm
Max. horizontal load on table	700 kg*
Speed of rotation	0,1 – 2,25 RPM
Tilting time (0° – 90°)	12 s
Max. tilting angle	170°
Max welding current	650 A
Remote control signal	24 V
Length x width	1400 x 920 mm
Weight	550 kg

* at 200 mm lifting point distance

Load diagram VHR 700

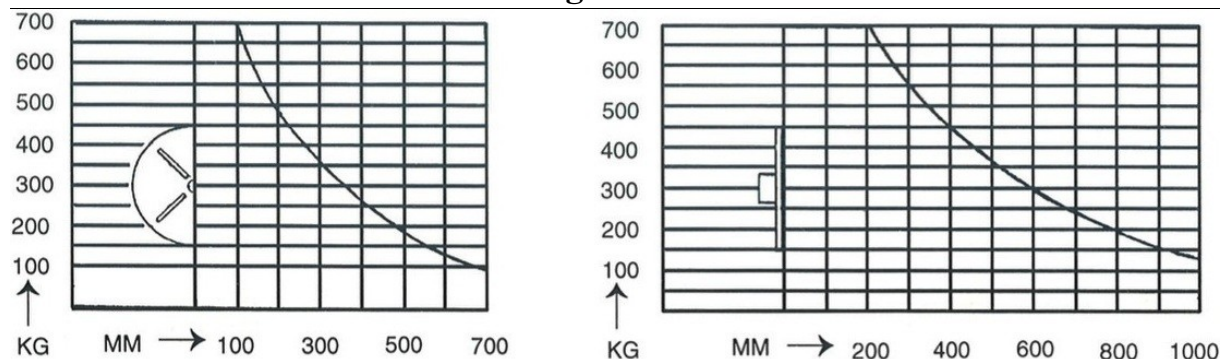

AxMek AB